

Grinna



Features

- Stylish design, unusual ceiling
- Efficiency up to 120 lm/w
- Narrow beam, brilliant luminous effect
- Glare control, UGR<19, UGR<16 optional
- SDCM<=4
- CRI >80, ErP compatible
- Easy and various installation
- 5 years guarantee

Applications

Meets the general lighting environment such as:

- Office
- Technical drawing workplace
- Precision work lab
- Restaurant
- School and Hospital
- Hallway & lobby
- Meeting Room
-



REV 1.1

7/26/2018

Sheenly LED Troffer Light

Sheenly innovative Back-lite Troffer light-Grinna show a stylish design in your ceiling. The high efficiency and revolutionary optical system make Grinna an attractive alternative to popular surface lighting.

The special optical system of Grinna combines square reflector elements to a linear structure, then provides excellent glare-free light in the workplace.

Specifications

Dimension (mm)

EGS	595 x 595 x 30
GGs	622 x 622 x 30
EGR	295 x 1195 x 30

Power & Lumen Output

Square	30W	3550 lm @ 4000K
Rectangle	30W	3550 lm @ 4000K

Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K

Color Rendering Index

>80

Rated Life (L80)

50,000 Hours

Housing

Aluminum

Optics

Opal

Beam Spread

90°

Operating Temperature

-20°C to +45°C (Amb.)

Input Voltage

220-240V/AC

Power Factor

>0.95

Net Weight (Includes Driver)

1.12 kg -1.50kg

Glow Wire

650 °C (850°C optional)

IP

IP20

(Room Side IP54 optional)

IK

IK05


Installation

Recessed

Pendent Mounted

Box Surface Mounted

Dimension

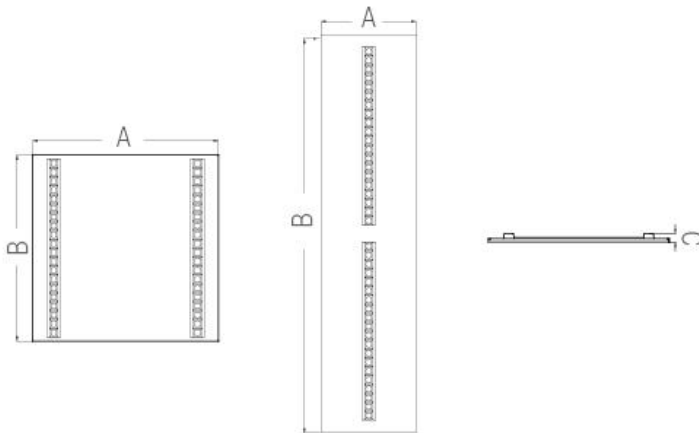

	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)
EGS	595±1	595±1	30±1
GGS	622±1	622±1	30±1
EGR	295±1	1195±1	30±1

Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	TRO=Troffer	30W	WW=3000 ±200K NW=4000 ±250K PW=5700 ±350K	EGS GGS EGR	WH=White SI=Silver	

*Standard finishing comes in White, for other finishing color please specify when place the order.

Part Number	Power	CCT	Lumen Output	Beam	Dimension [mm]
SL-TRO-30W-XW-EGS	30W	3000±200K	3300	90°	595 x595 x30
SL-TRO-30W-NW- EGS	30W	4000±250K	3500	90°	595 x595 x30
SL-TRO-30W-PW- EGS	30W	5700±350K	3600	90°	595 x595 x30
SL-TRO-30W-WW-GGS	30W	3000±200K	3300	90°	622 x622 x30
SL-TRO-30W-NW-GGS	30W	4000±250K	3500	90°	622 x622 x30
SL-TRO-30W-PW-GGS	30W	5700±350K	3600	90°	622 x622 x30
SL-TRO-30W-XW-EGR	30W	3000±200K	3300	90°	295 x1195 x30
SL-TRO-30W-NW- EGR	30W	4000±250K	3500	90°	295 x1195 x30
SL-TRO-30W-PW- EGR	30W	5700±350K	3600	90°	295 x1195 x30

Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-TRO-30W-XW-EGS	1	L675*W340*H675	5	720	1440
SL-TRO-30W-NW- EGS	1	L675*W340*H675	5	720	1440
SL-TRO-30W-PW- EGS	1	L675*W340*H675	5	720	1440
SL-TRO-30W-WW-GGS	1	L675*W340*H675	5	720	1440
SL-TRO-30W-NW-GGS	1	L675*W340*H675	5	720	1440
SL-TRO-30W-PW-GGS	1	L675*W340*H675	5	720	1440
SL-TRO-30W-XW-EGR	1	L1350*W220*H390	4	800	1600
SL-TRO-30W-NW- EGR	1	L1350*W220*H390	4	800	1600
SL-TRO-30W-PW- EGR	1	L1350*W220*H390	4	800	1600

Application



Shanghai Sheenly Lighting Co., Ltd.

No.1688 Lianhang Road, Bldg 22, Minhang District, Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2018 Sheenly Lighting all rights reserved.