

R380



Features

- Diameter 380mm
- Modern, stylish and Innovative design
- Uniform light output
- Durable with life span over 50,000 hours
- 5 Years Guarantee
- Versatile installation, Recessed/ Suspension/ Surface Mounted
- Simple and convenient installation

Applications

Meets the general and decoration lighting environment such as:

- Offices
- Restaurants
- Hotels
- Shops
- Schools and Hospitals
- Hallway & lobbies
- Meeting Rooms



REV 1.0
04/25/2017

Sheenly LED Round Panel Light



Sheenly LED Round Panel Light adopts qualified super bright LED as light source, which is stable, long life and no UV & IR emission. The anodized aluminum frame is stylish and fashionable with everlasting color. It is powered by low voltage constant current driver, which is safety, energy saving and long life.

Brand new round panel light R380, which is design with elegant appearance and versatile installation, combines three kinds of installation by the intelligent arrangement of its accessories. R380 creates extremely harmonies and uniform lights and provides an exciting effect.

Specifications

Dimension	D380*13.5 mm
Power & Lumen Output	
18W	1800 lm @4000K
25W	2500 lm @4000K
Color Temperature	
Warm White	3000 ±200K
Natural White	4000 ±250K
Day White	5000 ±300K
Pure White	5700 ±350K
Color Rendering Index	>80
Rated Life (L70)	50,000 Hours
Housing	Aluminum
Optics	PMMA
Beam Spread	120°
Operating Temperature	-10°C to +40°C (Amb.)
Input Voltage	100-277/220-240V/AC
Power Factor	>0.9
Working Voltage	
18W	24 V/DC±2
25W	36 V/DC±3
IP	IP20
Installation	Recessed Suspension Surface Mounted

Dimension and Illumination Diagram

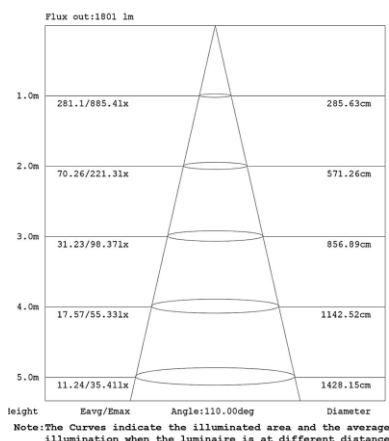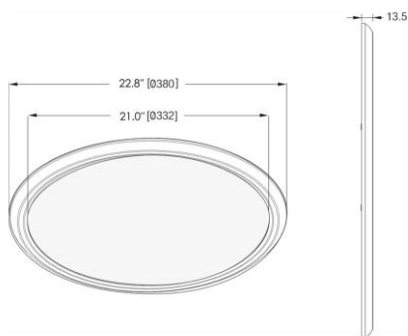

Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel	18W 25W	WW=3000 ±200K NW=4000 ±250K DW=5000 ±300K PW=5700 ±350K	U40	WH=White	

Part Number	Power	CCT	Lumen Output	Beam	Dimension
SL-PAN-18W-WW-U40	18W	3000 ±200K	1800	120°	D380*13.5 mm
SL-PAN-18W-NW-U40		4000 ±250K	2000		
SL-PAN-18W-DW-U40		5000 ±300K	2100		
SL-PAN-18W-PW-U40		5700 ±350K	2150		
SL-PAN-25W-WW-U40	25W	3000 ±200K	2300		
SL-PAN-25W-NW-U40		4000 ±250K	2500		
SL-PAN-25W-DW-U40		5000 ±300K	2600		
SL-PAN-25W-PW-U40		5700 ±350K	2650		

Accessory



Suspension Kit:
Round Driver Box, Steel Cables, Screws, etc.

Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China
Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.