

Plinx



Sheenly LED Linear Light

Sheenly's new designed LED Linear Light Plinx comes with complete aluminum extrusion body, making it perfect for suspension and easy for multiple linear connections.

Plinx is the ideal replacement for traditional grid lights and fluorescent tubes. It is powered by low voltage constant current driver, which is safety, energy saving and long life.

Specifications

Dimension

26W	900*150*10 mm
40W	1200*150*10 mm
50W	1450*150*10 mm

Power & Lumen Output

26W	2000 lm @ 4000K
40W	3000 lm @ 4000K
50W	4000 lm @ 4000K

Color Temperature

Warm White	3000K ±200K
Natural White	4000K ±250K
Pure White	5700K ±350K

Color Rendering Index

>80

Rated Life (L70)

50,000 Hours

Housing

Aluminum Opal

Beam Spread

120°

Operating Temperature

-20°C to +60°C (Amb.)

Input Voltage

200-240V/AC

Power Factor

>0.95

Working Voltage

26W	34V/DC
40W	25V/DC
50W	34V/DC

Working Current

26W	700 mA
40W	1400 mA
50W	1400 mA

Net Weight

2.9 Kg

Glow Wire

650 °C (850°C Optional)

IP

IP20

IK

IK08

Installation

Suspension/
Surface Mounted

Features

- Specially designed for suspended installation, easy installation kit
- Easily connectable
- Full aluminum extrusion body, rigid, robust, durable
- Modern, stylish
- Durable with life span over 50,000 hours
- 5 Years Guarantee
- Simple and convenient installation

Applications

A perfect luminaire for open space area in various applications such as:



- Super Markets
- Offices
- Workshops
- Shops
- Schools
- Hospitals
- Meeting Rooms



REV 1.1

04/14/2016

Dimension and Illumination Diagram

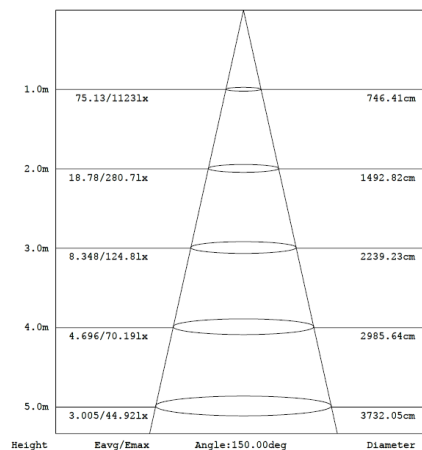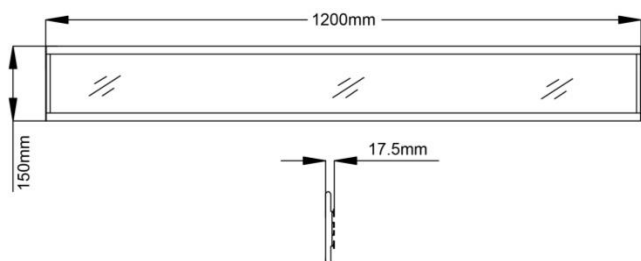

Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel	26W 40W 50W	WW=3000 ±200K NW=4000 ±250K PW=5700 ±350K	PX	SI=Silver	

Part Number	Power	CCT	Lumen Output	Beam	Dimension
SL-PAN-26W-WW-PX90	20W	3000 ±200K	1800	120°	900*150*10 mm
SL-PAN-26W-NW-PX90	20W	4000 ±250K	2000	120°	900*150*10 mm
SL-PAN-26W-PW-PX90	20W	5700 ±350K	2000	120°	900*150*10 mm
SL-PAN-40W-WW-PX120	40W	3000 ±200K	2800	120°	1200*150*10 mm
SL-PAN-40W-NW-PX120	40W	4000 ±250K	3000	120°	1200*150*10 mm
SL-PAN-40W-PW-PX120	40W	5700 ±350K	3000	120°	1200*150*10 mm
SL-PAN-50W-WW-PX150	50W	3000 ±200K	3800	120°	1450*150*10 mm
SL-PAN-50W-NW-PX150	50W	4000 ±250K	4000	120°	1450*150*10 mm
SL-PAN-50W-PW-PX150	50W	5700 ±350K	4000	120°	1450*150*10 mm

Accessory



Suspension Kit:
Driver Box ,Steel Cables, Screws, accessories, etc.

Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2015 Sheenly Lighting all rights reserved.

Available Type: Plinx

Step 1

Dimension	A(mm)	B(mm)	C(mm)
Plinx 900			
Plinx 1200	require	220	35
Plinx 1500			

Step 2

Driver box installation is same as slimo

Step 3

Step 4

Step 5

Step 6

Interconnectable

**Lighting Up
a New World**