

## R580



### Features

- Diameter 22.8"
- Modern, stylish and Innovative design
- Uniform light output
- White/Black/Silver finishing available
- Durable with life span over 50,000 hours
- 5 Years Guarantee
- Simple and convenient installation

### Applications

Meets the general and decoration lighting environment such as:

- Offices
- Restaurants
- Hotels
- Shops
- Schools and Hospitals
- Hallway & lobbies
- Meeting Rooms



REV 1.0

08/18/2016

## Sheenly LED Round Panel Light

Sheenly LED Round Panel Light adopts qualified super bright LED as light source, which is stable, long life and no UV & IR emission. The anodized aluminum frame is stylish and fashionable with everlasting color. It is powered by low voltage constant current driver, which is safety, energy saving and long life.



Sheenly LED Panel light is the ideal replacement for traditional grid lights and fluorescent tubes. Moreover, Sheenly Panel light creates extremely harmonies and uniform lights, which conventional light never achieved.

### Specifications

<b>Dimension</b>	D22.8"[D580*15 mm]
<b>Power &amp; Lumen Output</b>	
40W	3400 lm @ 4000K
60W	5000 lm @ 4000K
<b>Color Temperature</b>	
Warm White	3000 ±200K
Natural White	4000 ±250K
Day White	5000 ±300K
<b>Color Rendering Index</b>	>80
<b>Rated Life (L70)</b>	50,000 Hours
<b>Housing</b>	Aluminum
<b>Beam Spread</b>	120°
<b>Operating Temperature</b>	-20°C to +60°C (Amb.)
<b>Input Voltage</b>	100-277V/AC
<b>Power Factor</b>	>0.95
<b>Working Voltage</b>	
40W	45±3 V/DC
60W	42±2 V/DC
<b>Working Current</b>	
40W	1050mA
60W	1400mA
<b>Net Weight</b>	3.15 Kg
<b>Glow Wire</b>	650 °C (850°C Optional)
<b>IP</b>	IP40
<b>IK</b>	IK05
<b>Installation</b>	Suspension

## Dimension and Illumination Diagram

Inch [mm]

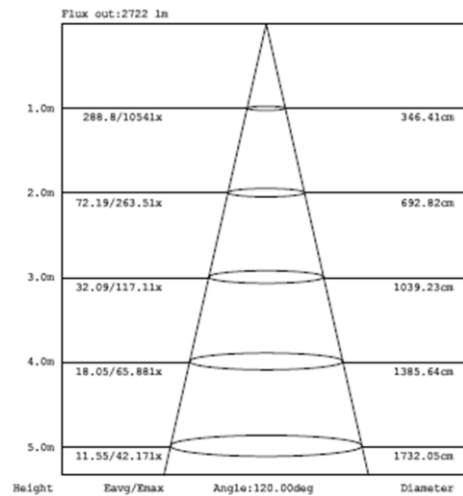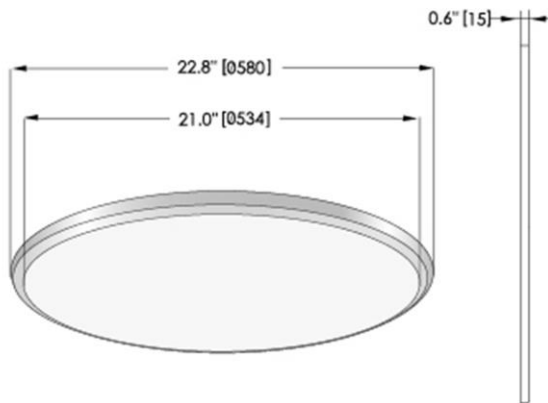

## Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel	40W 60W	WW=3000 ±200K NW=4000 ±250K DW=5000 ±300K	U60	BK=Black WH=White	

\*Standard finishing comes in White, for other finishing color please specify when place the order.

Part Number	Power	CCT	Lumen Output	Beam	Dimension
SL-PAN-40W-XW-U60	40W	3000K/4000K/5000K	3400	120°	D22.8" [D580*15 mm]
SL-PAN-60W-XW-U60	60W	3000K/4000K/5000K	5000	120°	D22.8" [D580*15 mm]

## Accessory



Suspension Kit:  
Round Driver Box, Steel Cables, Screws, etc.



### Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

\*All specifications subject to change without notice.

©2009-2015 Sheenly Lighting all rights reserved.