

### Lily



### Features

- Ultra modern, stylish and Innovative design
- Excellent light distribution, a blend of space + accent lighting. Innovative hybrid of edge lit and back lit lighting technology
- Color variable, different color for spatial and accent lighting
- Energy efficient, >100lm/W
- Anti-Glare UGR19
- No UV or IR emissions
- Durable with life span over 50,000 hours
- Environmentally friendly – fully recyclable, no mercury or other hazardous materials
- Simple and convenient installation

### Applications

A perfect luminaire for open space area in various applications such as:

- Restaurants
- Offices
- Residentials
- Theatres
- Shopping malls
- 



REV 1.0

04/29/2016

### Sheenly LED Space Lighting



Sheenly's new designed LED Light Lily is a revolutionary product, which developed for space lighting + Accent Lighting, A fixture combines space and accent lighting. This product has a built-in driver, and stylish appearance with innovative design.

A hybrid of edge lit and backlit technology gives an excellent blend of space and accent lighting, making it the first of its kind in the lighting industry. Lily is a perfect luminaire for open space area in various applications.

### Specifications

<b>Dimension</b>	D15" [D380*90mm]
<b>Power &amp; Lumen Output</b>	
26W	2400 lm @ 4000K
36W	3250 lm @ 4000K
<b>Color Temperature</b>	
Warm White	3000K ±200K
Natural White	4000K ±250K
Day White	5000K ±300K
<b>Color Rendering Index</b>	>80
<b>Rated Life (L70)</b>	50,000 Hours
<b>Housing</b>	Aluminum
<b>Optics</b>	Opal/Micro Prismatic
<b>Beam Spread</b>	Up/Down
<b>Operating Temperature</b>	-20°C to +60°C (Amb.)
<b>Input Voltage</b>	100-277V/AC
<b>Power Factor</b>	>0.95
<b>Working Voltage</b>	
26W	26±2 V/DC
36W	46±3 V/DC
<b>Working Current</b>	700 mA
<b>Net Weight</b>	2.5 Kg
<b>Glow Wire</b>	650 °C (850°C Optional)
<b>IP</b>	IP20
<b>IK</b>	IK05
<b>Installation</b>	Suspension

## Dimension and Illumination Diagram

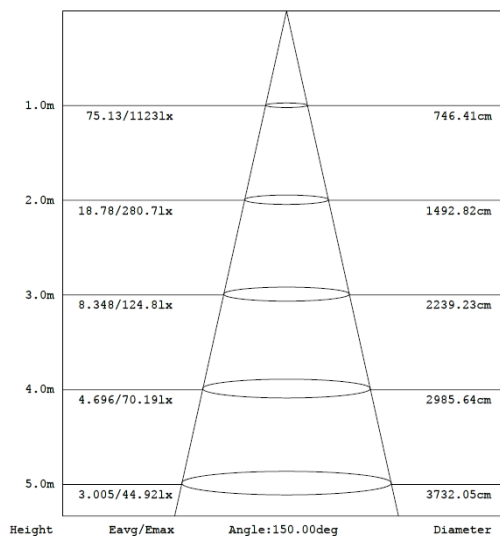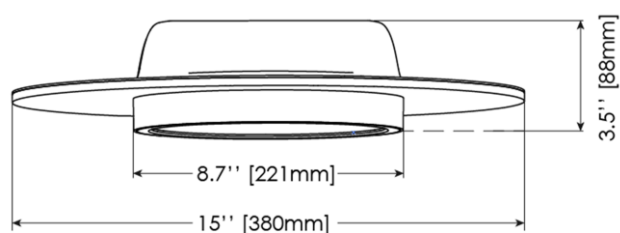

## Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel	26W 36W	WW=3000 ±200K NW=4000 ±250K DW=5000 ±300K	ULY	BK=Black SI=Silver	

Part Number	Power	CCT	Lumen Output	Beam	Dimension Inch [mm]
SL-PAN-26W-WW-ULY	26W	3000 ±200K	2200	Up/Down	D15" [D380*90]
SL-PAN-26W-NW-ULY	26W	4000 ±250K	2400	Up/Down	D15" [D380*90]
SL-PAN-26W-DW-ULY	26W	5000 ±300K	2400	Up/Down	D15" [D380*90]
SL-PAN-36W-WW-ULY	36W	3000 ±200K	3050	Up/Down	D15" [D380*90]
SL-PAN-36W-NW-ULY	36W	4000 ±250K	3250	Up/Down	D15" [D380*90]
SL-PAN-36W-DW-ULY	36W	5000 ±300K	3250	Up/Down	D15" [D380*90]

## Accessory



Suspension Kit:  
Steel Cables, Screws, etc.



### Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

\*All specifications subject to change without notice.

©2009-2015 Sheenly Lighting all rights reserved.